

dimensions (mm)			kg	max bar	max l/min	size	type	A B C	symbol	type	catalogue no.
L	W	H									


**DIRECTIONAL CONTROL VALVES, NG 10, SOLENOID OPERATED, solenoid wetpin**

284	70	104	5,4	315	75	NG 10	D 3W-xx-A G-101-xx-A	B		
195	70	104	3,9	315	75	NG 10	D 3W-xx-B G-101-xx-B	B		
284	70	104	5,4	315	75	NG 10	D 3W-xx-C G-101-xx-C	B		
284	70	104	5,4	315	75	NG 10	D 3W-xx-D G-101-xx-D	B		
195	70	104	3,9	315	75	NG 10	D 3W-xx-E G-101-xx-E	B		
195	70	104	3,9	315	75	NG 10	D 3W-xx-F G-101-xx-F	B		
284	70	104	5,4	315	75	NG 10	D 3W-xx-H G-101-xx-H	B		
195	70	104	3,9	315	75	NG 10	D 3W-xx-K G-101-xx-K	B		
195	70	104	3,9	315	75	NG 10	D 3W-xx-M G-101-xx-M	B		
284	70	104	5,4	315	75	NG 10	D 3W-xx-R G-101-xx-R	B		
284	70	104	5,4	315	75	NG 10	D 3W-xx-S G-101-xx-S	B		

G-101 number series are used at present  
D 3W number series will be used from 1979 onwards

Pattern CETOP RP 35 H - 4.2 - 4 - 5 - 315  
DIN 24 340 Form A

2502-140/0

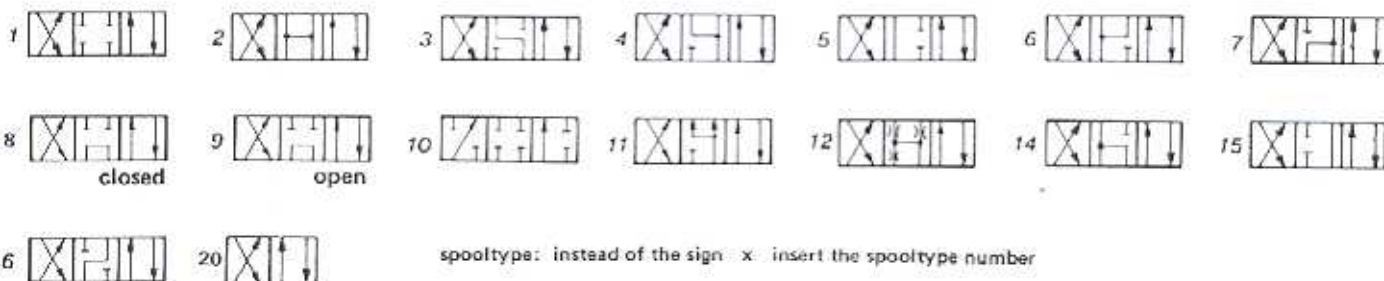

**DIRECTIONAL CONTROL VALVES, NG 10, PNEUMATIC OPERATED**

210	70	79	4,5	315	75	NG 10	D 3A-xx-A G-103-xx-A	C		
165	70	79	4,0	315	75	NG 10	D 3A-xx-B G-103-xx-B	C		
210	70	79	4,5	315	75	NG 10	D 3A-xx-C G-103-xx-C	C		
210	70	79	4,5	315	75	NG 10	D 3A-xx-D G-103-xx-D	C		
165	70	79	4,0	315	75	NG 10	D 3A-xx-E G-103-xx-E	C		
165	70	79	4,0	315	75	NG 10	D 3A-xx-F G-103-xx-F	C		

G-103 number series are used at present  
D 3A number series will be used from 1979 onwards

Pattern CETOP RP 35 H - 4.2.4 - 5 - 315  
DIN 24 340 Form A

cont.....

2502-140/3